

ARCTIC CHILL BEER SYSTEMS

VLM-115-FC-2T

SELF-CONTAINED FLASH CHILLER



Self-contained cabinet chiller delivers reliable, consistent draft performance in venues with up to 50ft of line run. Dual stainless-steel beer coils. Ideal for space efficiency.

Standard Features & Options

- Two tap chrome, cobra style draft tower with stainless steel flow control faucets
- 13.375" cup or pitcher clearance
- Durable and easy to clean, 304 stainless steel cabinet mounted on 4" caster
- Integrated drain-pan with 3/4" PVC drain
- Ice cold bath water recirculates into draft tower
- Two, 5/16" OD, 304 SS, beer coils
 - Coil one: 118ft
 - Coil two: 105ft.
- Rated for real world operating conditions up or 100°F
- Quiet operation
- Environmentally friendly R290 refrigerant

Optional Features & Accessories

- Primary regulators:
 - ☐ 24PL/H2L1U2: CO2, 0-60 PSI, with shut off and 5/16" barb
 - ☐ 24PLN/H1L1U2: N2, 0-60 PSI, with shut off and 5/16" barb
- Wall brackets:
 - ☐ CWB1: Single CO2/N2 gas cylinder wall bracket
 - ☐ CWB2: Twin CO2/N2 gas cylinder wall bracket
- Keg coupler:
 - ☐ 700-220DSS: "D" Style, "Sankey" keg coupler, 304 SS




ARCTIC CHILL BEER SYSTEMS

VLM-115-FC-2T

SELF-CONTAINED FLASH CHILLER



Scan for more info.

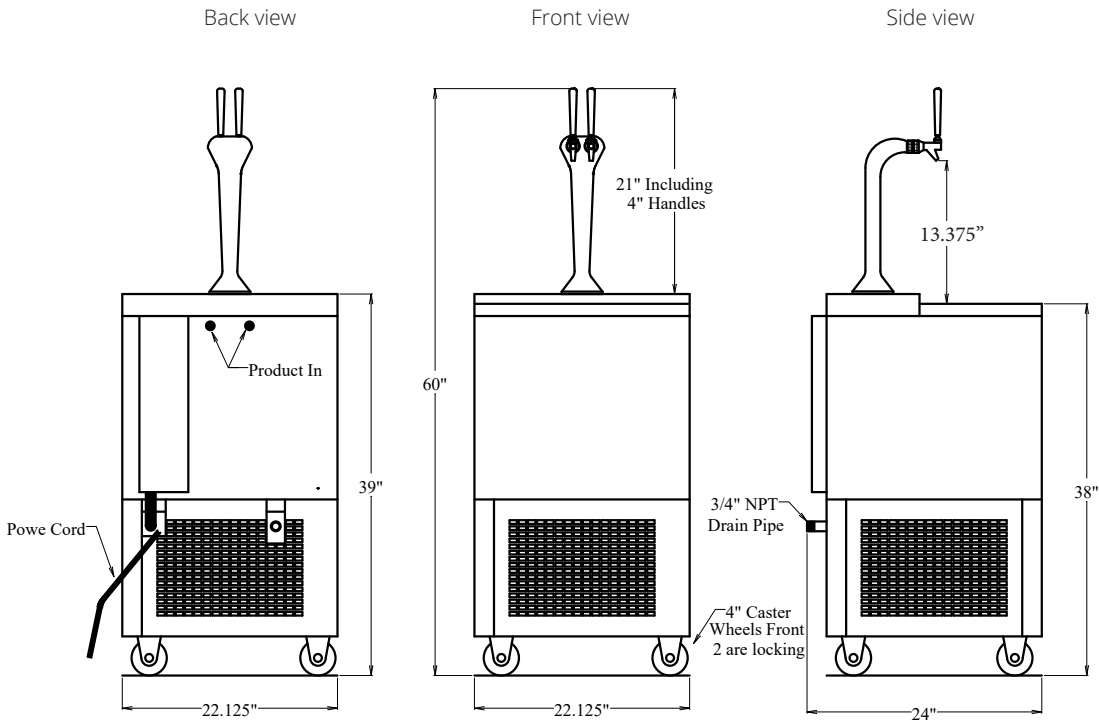

Chiller horse power	1/2 H.P.
Voltage/phase/amps	120/1/7.1
Refrigerant	R290
Refrigeration ampacity	5.9
Pump ampacity (each)	1.2
Height	60"
Depth	24"
Width	22.125"
Ship weight	250 lbs

Dry weight	200 lbs
Operational weight	367 lbs
Water bath	20 gal
Ice bank	90 lbs
Max. number of beers	2