

JUICE BLAST

JUICE EQUIPMENT

Countertop Fountain Dispensers

R290

Discover a complete range of essential products for a top-notch juice system at ICI

C-6000-J-PP-SS

POST-MIX JUICE DISPENSER WITH PERISTALTIC PUMPS




Qty	Part
☐	C-6000-J-4-PP-SS 4 valves 4 flavors
☐	C-6000-J-6-PP-SS 6 valves 6 flavors

Features:

- Self-contained, countertop, non-carb, post-mix, fountain dispenser
- All 304 Stainless steel construction
- Integrated peristaltic pumps eliminates the need of BIB pumps, and compressed gas
- Mechanical refrigeration with 12-gallon water bath & 35lb. ice bank
- Lift out refrigeration deck for easy service
- Water coils submerged in water bath to achieve optimum dispense temperature
- Available with up to 6 non-carb valves
- Electric key lock for easy cleaning or to lock out dispenser
- PFC-II-PP electric valves
- Rated for 4 twelve-ounce drinks per minute (<45°F with an influent water temperature of <75°F)
- Illuminated front merchandiser with graphics on each side
- 8ft NEMA 5-15P power cord
- ETL and NSF Listed
- Made in the USA

C-6000-J-PP-SS JUICE BLAST FOUNTAIN DISPENSER

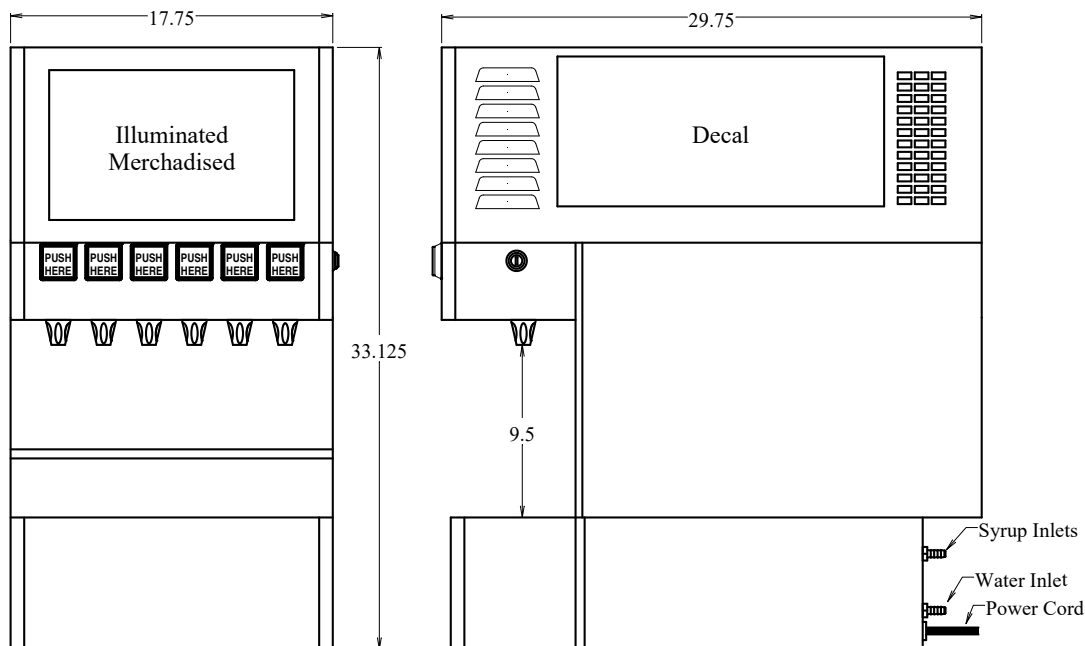

Chiller horse power	1/3 H.P.
Voltage/phase/amps	120/1/8.49
Refrigerant	R290
Refrigeration ampacity	7.1
Agitator pump amps	0.55
Transformer amps	0.84
Height	33.125"
Depth	29.75"
Width	17.75"
Ship weight	200 lbs
Dry weight	165 lbs
Draw rate	4-12 oz/min
Water bath	12 gal
Ice bank	35 lbs

ACCESSORIES:

- ☐ CR-24FCP: Twin filter system with prefilter, with compact fibredyne filters, 19"H x 17"W 5 gpm, 30,000 gal, TOC & 1/2 micron filtration
- ☐ CR-24FC: Twin filter system without prefilter, with compact fibredyne filters, 19"H x 17"W 5 gpm, 30,000 gal, TOC & 1/2 micron filtration

Beverage systems for every application and use.

16630 Koala Rd, Adelanto, CA 92301 | (800) 854-1177 | ici.us



Rev. 09182025