

SODA FAST

FOUNTAIN EQUIPMENT

Countertop Fountain Dispensers

R290

Discover a complete range of essential products for a top-notch fountain system at ICI

P-2000-2 P-2000-3 P-2000-4

POST-MIX FOUNTAIN CHILLER





Qty	Part
☐	P-2000-2-2H 2 valves 2 flavors (2 carb)
☐	P-2000-2-1HS 2 valves 2 flavors (1 carb, 1 non-carb)
☐	P-2000-3-3H 3 valves 3 flavors (3 carb)
☐	P-2000-3-2HS 3 valves 3 flavors (2 carb, 1 non-carb)
☐	P-2000-4-4H 4 valves 4 flavors (4 carb)
☐	P-2000-4-3HS 4 valves 4 flavors (3 carb, 1 non-carb)

Features:

- Self-contained, countertop, cold carb, post-mix, fountain dispenser
- Mechanical refrigeration with 2.5-gallon water bath & 6 lb. ice bank
- Carbonator tank, water and syrup coils submerged in water bath to achieve optimum dispense temperature
- Available with up to 4 valves (carbonated and non-carb)
- Electric key lock for easy cleaning or to lock out dispenser
- PFC-II electric valves for ease of service. Rated for 1 twelve-ounce drinks per minute (<40°F with an influent water temperature of <75°F)
- Black vinyl exterior with 304 SS faucet plate and removable drip pan
- ETL and ETL Sanitation listed
- Made in the USA
- 8ft NEMA 5-15P power cord

P-2000-2 P-2000-3 P-2000-4 SODA FAST FOUNTAIN DISPENSER

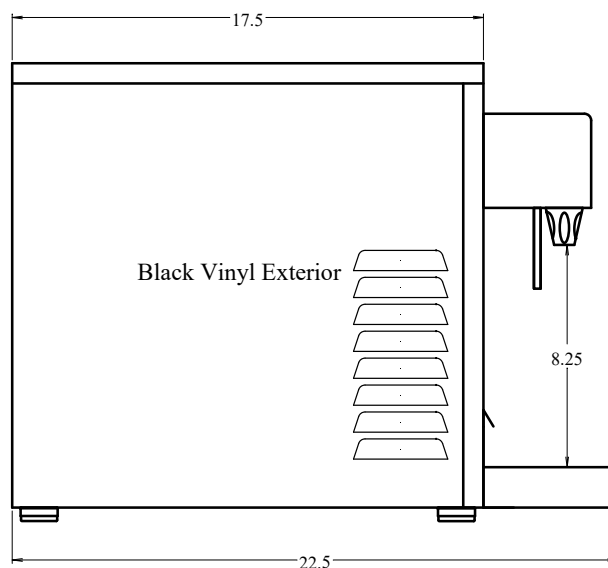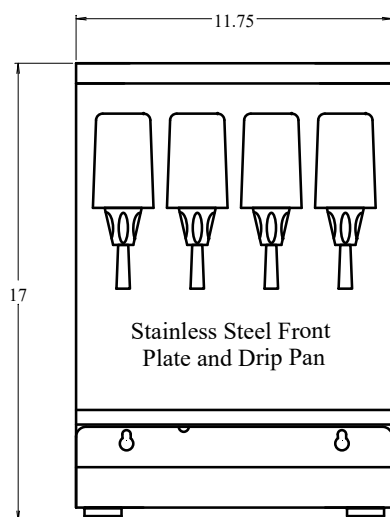

Chiller horse power	1/9 H.P.
Voltage/phase/amps	120/1/4.12
Refrigerant	R290
Refrigeration ampacity	2.2
Carb pump amps	1.2
Agitator pump amps	0.22
Transformer amps	0.5
Height	17"
Depth	22.5"
Width	11.75"
Ship weight	110 lbs
Dry weight	75 lbs
Draw rate	1-12oz/min
Water bath	2.5 gal
Ice bank	6 lbs

ACCESSORIES:

- ☐ 24PL/H1L3U8B13: Primary CO2 regulator, high-pressure 160 PSI 1/4" flare with check valve, nylon flare and cylinder washer
- ☐ CR-CWB1: Single cylinder wall bracket to safely strap and secure cylinders to the wall
- ☐ CR-CWB2: Two cylinders wall bracket to safely strap and secure cylinders to the wall
- ☐ CR-CTAC2: CO2 cylinder auto change over device. Connects two cylinders at one time to double your CO2 capacity
- ☐ CR-14FCP: Single filter system with prefilter, with compact Fibredyne filters, 2.5 gpm, 15,000-gal, TOC & 1/2 micron filtration
- ☐ CR-14FC: Single filter system without prefilter, with compact Fibredyne filters, 5 gpm, 15,000-gal, TOC & 1/2 micron filtration
- ☐ BIB-RACK 4FL: Backroom kit, 4 BIB pumps, two wide by two high flat shelves

Beverage systems for every application and use.

16630 Koala Rd, Adelanto, CA 92301 | (800) 854-1177 | ici.us

ICI INTERNATIONAL
CARBONIC INC.

Rev. 09182025