

SODA FAST

FOUNTAIN EQUIPMENT
Remote Fountain Chillers

R290

Discover a complete range of essential products for a top-notch fountain system at ICI

P-2000-R

POST-MIX FOUNTAIN CHILLER





Qty	Part
☐	P-2000-R-1 Sparkling & chilled still (1 syrup coils)
☐	P-2000-R-2 Sparkling & chilled still (2 syrup coils)
☐	P-2000-R-3 Sparkling & chilled still (3 syrup coils)
☐	P-2000-R-4 Sparkling & chilled still (4 syrup coils)
☐	P-2000-R-5 Sparkling & chilled still (5 syrup coils)
☐	P-2000-R-6 Sparkling & chilled still (6 syrup coils)

Features:

- Self-contained, remote, cold carb chiller, for post mix dispenser towers or bar guns
- Undercounter recirculation system keeps water and syrup chilled from the chiller to the beverage dispenser or Bar Gun
- Reduced ice consumption compared to cold plate systems
- Durable, easy to clean, cabinet
- Black vinyl coated panels
- Reduced counter space needed compared to cold plate cooling systems
- Rated for 1 twelve-ounce drink per minute (<40°F with an influent water temperature of <75°F)
- ETL Listed
- Made in the USA
- 8ft NEMA 5-15P power cord

P-2000-R SODA FAST FOUNTAIN CHILLER

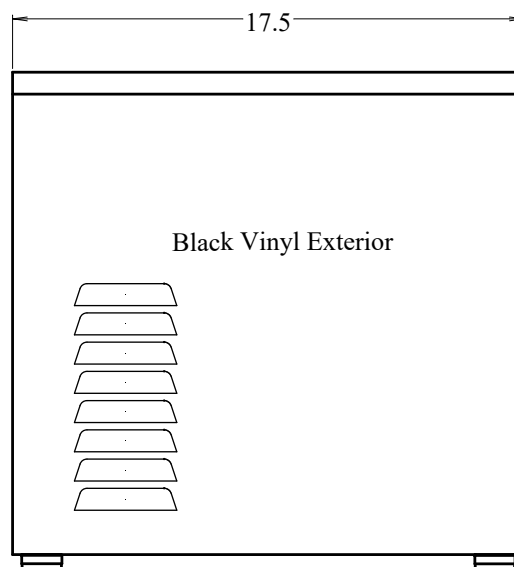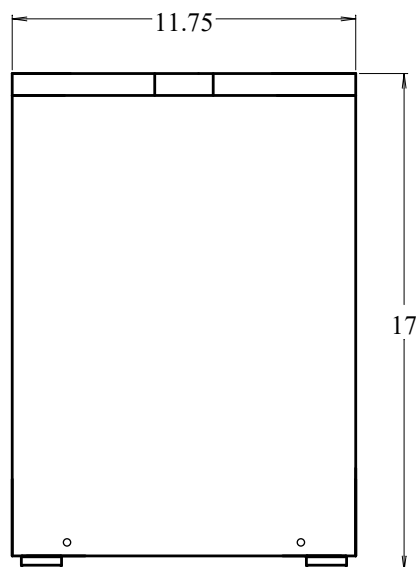

Chiller horse power	1/9 H.P.
Voltage/phase/amps	120/1/3.62
Refrigerant	R290
Refrigeration ampacity	2.2
Carb pump amps	1.2
Agitator pump amps	0.22
Height	17"
Depth	17.5"
Width	11.75"
Ship weight	105 lbs
Dry weight	70 lbs
Draw rate	1-12oz/min
Water bath	2.5 gal
Ice bank	6 lbs

ACCESSORIES:

- ☐ 24PL/H1L3U8B13: Primary CO2 regulator, high-pressure 160 PSI 1/4" flare with check valve, nylon flare and cylinder washer
- ☐ CR-CWB1: Single cylinder wall bracket to safely strap and secure cylinders to the wall
- ☐ CR-CWB2: Two cylinders wall bracket to safely strap and secure cylinders to the wall
- ☐ CR-CTAC2: CO2 cylinder auto change over device. Connects two cylinders at one time to double your CO2 capacity
- ☐ CR-14FCP: Single filter system with prefilter, with compact fibredyne filters, 15.23"H x 4.254"W 2.5 gpm, 15,000 gal, TOC & 1/2 micron filtration
- ☐ CR-14FC: Single filter system without prefilter, with compact fibredyne filters, 18"H x 8"W 2.5 gpm, 15,000 gal, TOC & 1/2 micron filtration
- ☐ BIB-RACK 4FL: Backroom kit, 4 BIB pumps, two wide by two high flat shelves
- ☐ BIB-RACK 6FL: Backroom kit, 6 BIB pumps, two wide by two high flat shelves

Beverage systems for every application and use.

16630 Koala Rd, Adelanto, CA 92301 | (800) 854-1177 | ici.us

ICI INTERNATIONAL
CARBONIC INC.

Rev. 10082025